



GENERATORI DI VUOTO MULTISTADIO M 10 SSX, M 14 SSX e M 18 SSX

Portata d'aria (NI/s) ai diversi gradi di vuoto (-KPa)


M10 SSX

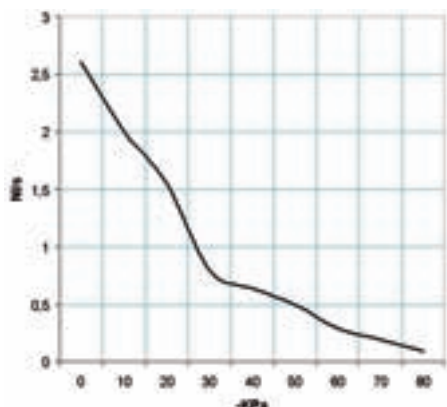

M14 SSX

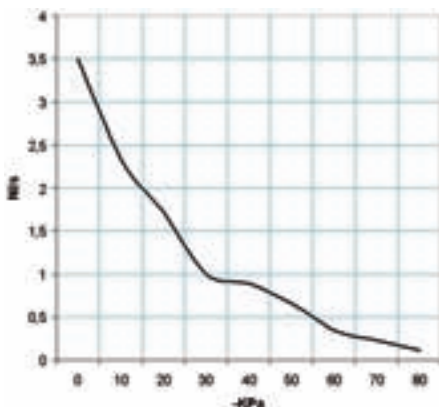


M18 SSX

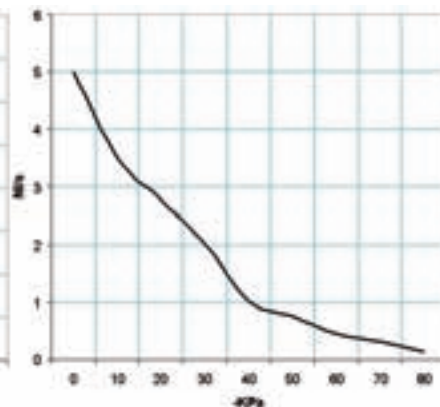


Generatore art.	Press. alim. bar	Consumo aria NI/s	Portata d'aria (NI/s) ai diversi gradi di vuoto (-KPa)										Vuoto max -KPa
			0	10	20	30	40	50	60	70	80	85	
M 10 SSX	5.0	1.9	2.61	2.00	1.55	0.80	0.64	0.50	0.29	0.19	0.09	0.01	85
M 14 SSX	5.0	2.5	3.50	2.33	1.72	1.00	0.89	0.67	0.35	0.24	0.11	0.01	85
M 18 SSX	5.0	3.6	5.00	3.50	2.78	2.02	1.02	0.75	0.44	0.30	0.14	0.01	85

Tempi di evacuazione (ms/l=s/m³) ai diversi gradi di vuoto (-KPa)


M10 SSX

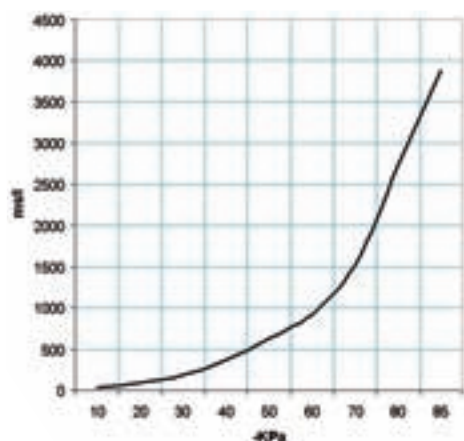

M14 SSX

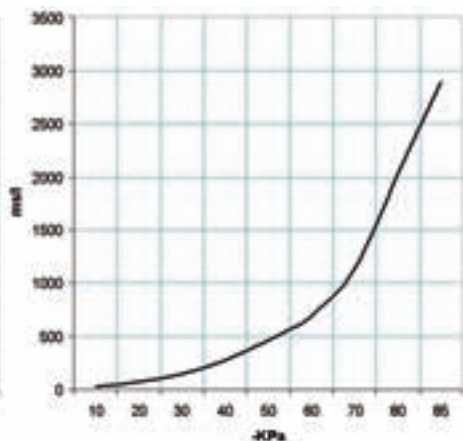


M18 SSX

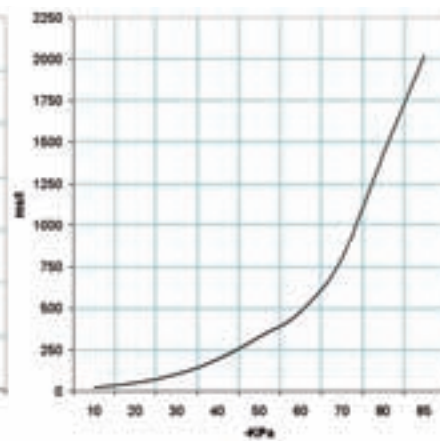


Generatore art.	Press. alim. bar	Consumo aria NI/s	Tempi di evacuazione (ms/l = s/m³) ai diversi gradi di vuoto (-KPa)										Vuoto max -KPa
			10	20	30	40	50	60	70	80	85		
M 10 SSX	5.0	1.9	40	93	188	371	629	918	1534	2731	3878	85	
M 14 SSX	5.0	2.5	30	69	140	276	469	685	1144	2036	2892	85	
M 18 SSX	5.0	3.6	21	48	98	193	327	478	799	1423	2020	85	

Accessori inclusi

Silenziatore art. SSX 3/8" su M10 e M14

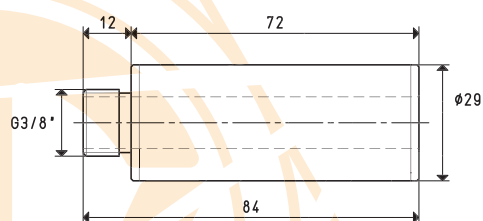

Silenziatore art. SSX 3/8" su M18

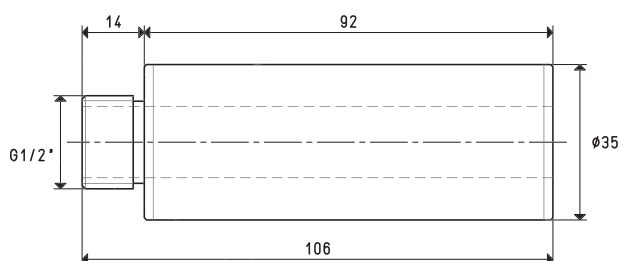

Sono disponibili i disegni 3D sul sito www.vuototecnica.net