
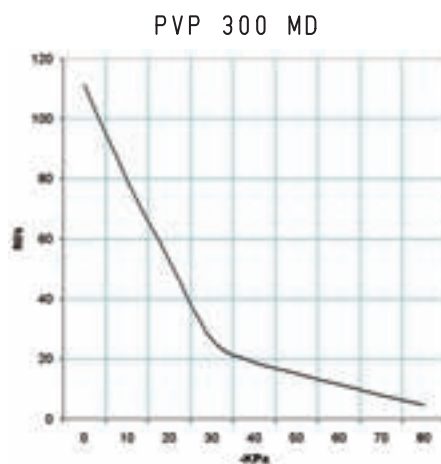




GENERATORI DI VUOTO MULTISTADIO, MODULARI, PVP 150 MD e 300 MD

Portata d'aria (NI/s) ai diversi gradi di vuoto (-KPa)

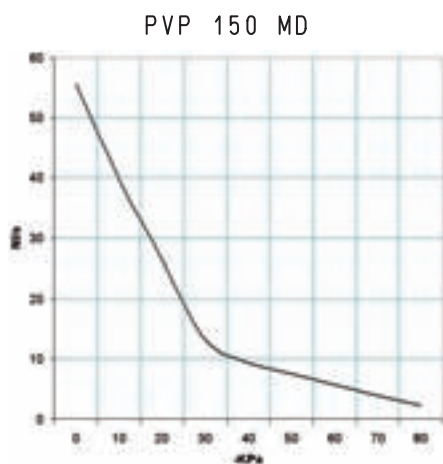

Generatore art.	Press. alim. bar	Consumo aria NI/s	Portata d'aria (NI/s) ai diversi gradi di vuoto (-KPa)										Vuoto max -KPa
			0	10	20	30	40	50	60	70	80		
PVP 150 MD	6.0	16	55.55	39.68	26.45	13.22	9.44	7.55	5.68	3.97	2.27	90	
PVP 300 MD	6.0	32	111.11	79.36	52.91	26.45	19.89	15.11	11.36	7.94	4.54	90	

Tempi di evacuazione (ms/l = s/m³) ai diversi gradi di vuoto (-KPa)

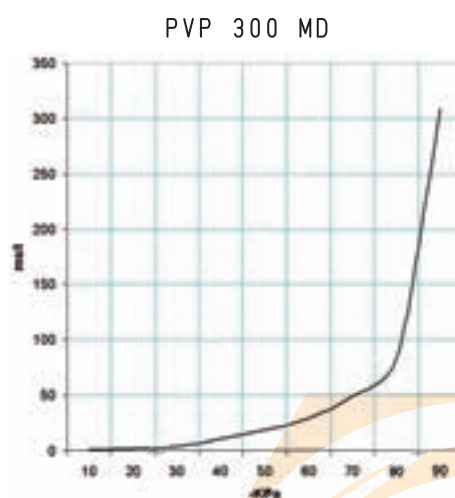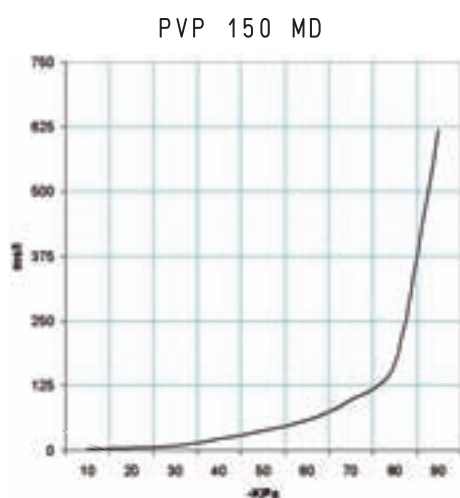

Generatore art.	Press. alim. bar	Consumo aria NI/s	Tempi di evacuazione (ms/l = s/m³) ai diversi gradi di vuoto (-KPa)								Vuoto max -KPa	
			10	20	30	40	50	60	70	80		90
PVP 150 MD	6.0	16	1.6	4.0	8.9	21.3	38.2	58.4	97.0	167.8	618	90
PVP 300 MD	6.0	32	0.8	2.0	4.4	10.6	19.1	29.2	48.5	83.9	386	90