
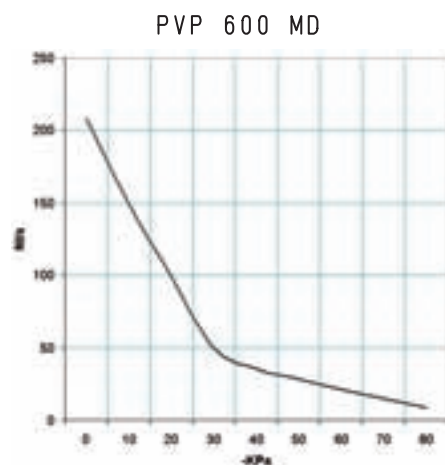




GENERATORI DI VUOTO MULTISTADIO, MODULARI, PVP 450 MD e 600 MD

Portata d'aria (NI/s) ai diversi gradi di vuoto (-KPa)

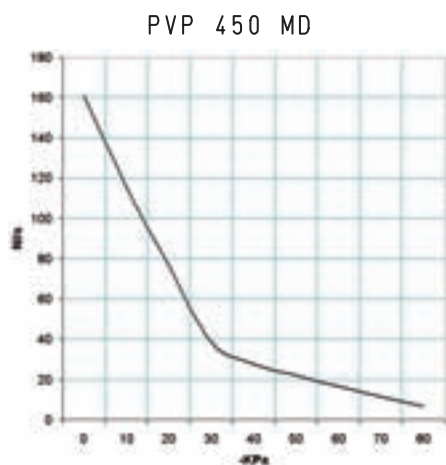

Generatore art.	Press. alim. bar	Consumo aria NI/s	Portata d'aria (NI/s) ai diversi gradi di vuoto (-KPa)										Vuoto max -KPa
			0	10	20	30	40	50	60	70	80		
PVP 450 MD	6.0	47.8	161.11	115.07	76.71	38.35	27.39	21.91	16.48	11.52	6.58	90	
PVP 600 MD	6.0	63.2	208.33	148.80	99.20	49.60	35.43	28.34	21.31	14.90	8.51	90	

Tempi di evacuazione (ms/l = s/m³) ai diversi gradi di vuoto (-KPa)

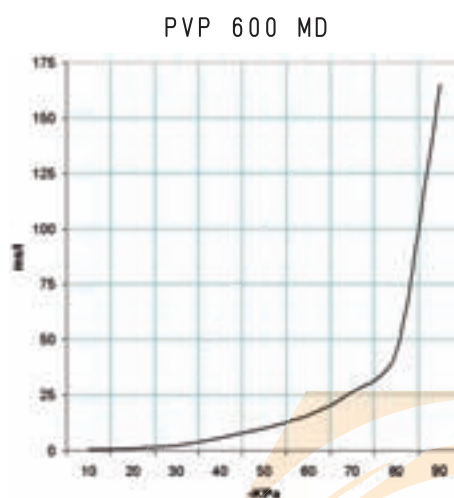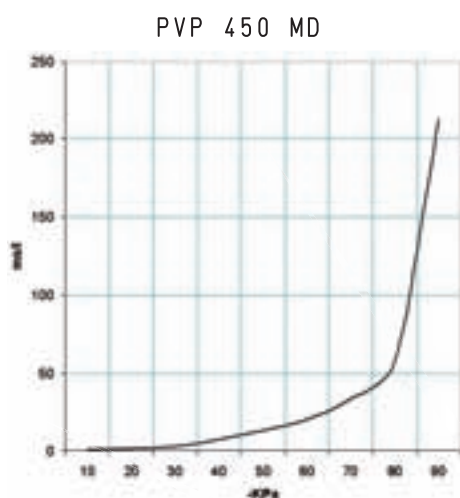

Generatore art.	Press. alim. bar	Consumo aria NI/s	Tempi di evacuazione (ms/l = s/m³) ai diversi gradi di vuoto (-KPa)									Vuoto max -KPa
			10	20	30	40	50	60	70	80	90	
PVP 450 MD	6.0	47.8	0.5	1.4	3.0	7.4	13.2	20.1	33.5	57.9	213	90
PVP 600 MD	6.0	63.2	0.4	1.0	2.4	5.7	10.2	15.6	25.9	44.8	165	90